

CLOW HORIZONTAL SWING CHECK VALVE

CLOW VALVE COMPANY

Underwriters and Factory Mutual Listed

The Clow UL & FM Horizontal Swing Check Valve is a product of modern design and advanced engineering which provides many features of construction that are an advantage to dependable operation in either horizontal or vertical installations.


This valve is engineered to provide maximum flexibility of operation.

The Clow is a clear opening valve, with standardized and completely interchangeable parts and is listed by both Underwriter's and Factory Mutual.



FIG. 126 FLANGED ENDS, BRONZE FACED

FIG. 126-A FLANGED ENDS, RUBBER FACED

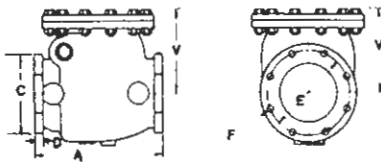

F-5347 FLANGED ENDS

Dimensions - Inches

| SIZE OF VALVE | 4 | 6 | 8 | 10 | 12 |
|--|---------|-------|--------|---------|--------|
| A FACE TO FACE OF END FLANGES | 13 | 16 | 19 | 22 | 26 |
| C DIAMETER OF END FLANGES | 9 | 11 | 13-1/2 | 16 | 19 |
| D THICKNESS OF END FLANGES | 15/16 | 1 | 1-1/8 | 1-3/16 | 1-1/4 |
| E DIAMETER OF BOLT CIRCLE, FLANGED ENDS | 7-1/2 | 9-1/2 | 11-3/4 | 14-1/4 | 17 |
| F NUMBER AND DIAMETER OF BOLTS, FLANGED ENDS | 8-5/8 | 8-3/4 | 8-3/4 | 12-7/8 | 12-7/8 |
| V CENTER LINE OF PORT TO TOP OF COVER | 7-13/16 | 9-3/4 | 11-1/2 | 14-1/16 | 15-3/8 |